

# canlet®


## LED VAPORPROOF

FIXTURE NUMBER

JOB TITLE

APPROVED BY

DATE

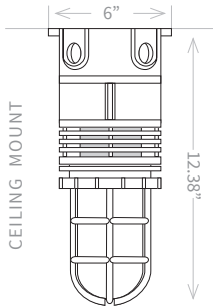

### CONSTRUCTION


The housing is corrosion free 30% glass-filled high impact resistant thermoset polyester making it ideal for high temperatures. The guard is manufactured in a high impact resistant glass reinforced polymer alloy. All screws are stainless steel. All inserts are brass. Inserts are ultrasonically welded into the housing. Gaskets are long life silicone.

### COLORS

Gray, Black, White, Red, Blue, Green, and Yellow.

### MAXIMUM AMBIENT OPERATING TEMPERATURE

104°F

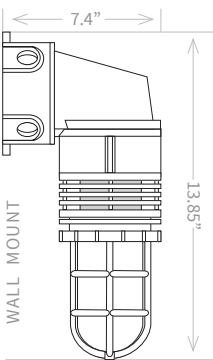


### LED INFO

Luminaire power = 19.2W  
 Color Temp = 4000K  
 CRI = 82  
 Total Light Output = 1832 lumens  
 Efficacy = 95.4 lumens/watt

### DRIVER INFO

Type = Constant current  
 Dimming Driver = 0-10v  
 120v = .972A / 277v = .926A  
 Max THD 15.69% at 277v  
 Standard drivers are programmable to match wattage or lumen requirements.

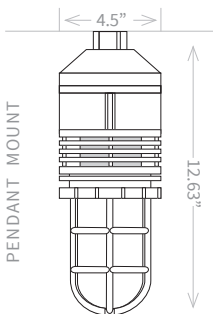

### INSTALLATION

The ceiling box has four 3/4" threaded hubs with liquid tight knockouts. Internal grounding system allows for hub to hub grounding continuity when using metallic wiring methods (lock nuts are required). Two mounting feet are spaced at 5 1/4". Pendant mount fixtures have a single 3/4" threaded hub with a locking set screw. Use minimum 90°C rated lead wires. Guard equipped with set screw for locking.

### COMPLIANCES

Meets Buy American Act, IP66, NEMA 4X, CSA certified, C22.2 No. 250.0-08 Luminaires, Conforms to UL 1598, 3rd Ed. 2008, CSA C22.2 No. 250.13-12, Conforms to UL 8750, 1st Ed.



Color	Wattage	Lamps	Mounting	Fixture Type	Guard	Globe Options
01: White	12W	L: LED	C: Ceiling Mount	F: With Box	OG: Guard Only	01 - Standard Opal Glass
02: Gray	15W		W: Wall Mount			09 - Standard Clear Glass
03: Black	20W		P: Pendant Mount			18 - Frosted Glass
04: Red						29 - Prismatic Clear Glass
05: Blue						* Colored globes may be available upon request
06: Green						** Polycarbonate globes not available
07: Yellow						



MORE INFORMATION & COST ESTIMATES

Call 800.441.1771 or email us at ostin@canlet.com  
 www.Canlet.com