

DATE:

PROJECT:

COMMENTS:

TEMPLE

RLM Signature Series



CONSTRUCTION

- Heavy-gauge spun metals
- Multiple gooseneck designs available
- Indoor and outdoor use

LAMP

- Standard 20W LED
- 150W maximum incandescent (Lamp not included)
- 32W maximum compact fluorescent (Lamp not included)

POWER SOURCE

- Standard HPF compact fluorescent ballasts
- Electronic LED driver, 0-10V dimmable UNV 120/277V

APPROVALS

- ETL
- CSA Certified




ORDERING LOGIC

SS-TEMPLE-I-H-150-1-DC-AL-GSC-WH

SERIES	LAMP TYPE	OUTPUT	WATTAGE	VOLTAGE	MOUNTING OPTIONS	MATERIAL	GLOBE	FINISH	
SS-TEMPLE	L LED	H High	LED	1 120V	DC Drop Cord	GOOSENECK ¹	AL Aluminum	GSC Glass Clear	WH White
	I Incandescent	N Normal	15 15W	2 277V	S Swivel Stem	C1 C1	BR Brass	GSO Glass Opal	AG Gray
	F Fluorescent		20 20W	3 347V	W Wall Custom	C2 C2	CP Copper	GPC Glass Prismatic Clear	BK Black
			INCANDESCENT		P Pendant (Straight Stem)	C3 C3	GS Galvanized Steel	GHC Heat Treated Clear Glass	RD Red
			150 150W Max.		PS Powered Suspension	C4 C4		PL PUK Lens	BL Blue
			FLUORESCENT			C5 C5			GR Green
			09 9W			C6 C6			YL Yellow
			13 13W			C7 C7			TWH Textured White
			18 18W			C8 C8			TBK Textured Black
			26 26W			C9 C9			TAL Textured Aluminum
			32 32W			C10 C10			CS ² Custom Color
		42 42W			C11 C11				
					C Custom				

ORDERING NOTES
 1. Standard 3/4" threaded hub
 2. All RAL Colors Available




SEE NEXT PAGE FOR ACCESSORIES

ACCESSORIES (ORDER SEPARATELY)

SS-TEMPLE-BP

DIMENSIONS

SERIES	ACCESSORIES
SS-TEMPLE	BP Back Plate
	PA Pig Tail Adapter
	AC Air Craft Cables
	OG Globe Guard (Not Available with Polycarbonate Globes)
SS-TEMPLE	

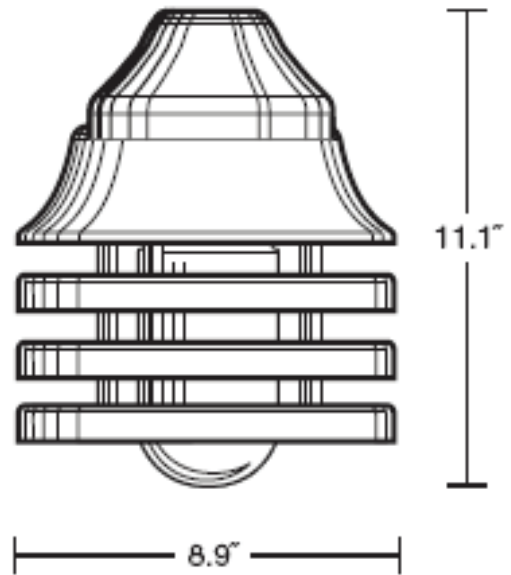

MOUNTING OPTIONS

Mounting Options

Signature Series fixtures can be mounted in a variety of ways, including tough weather resistant cord, braided cord, and a variety of stock goosenecks. Goosenecks can also be custom fabricated to fit any application requirement. Ask your representative for more details.

